




INTERNATIONAL
CHAIN AND CABLE

ATV DIAMOND STYLE TIRE CHAINS INSTALLATION INSTRUCTIONS



1. LAY CHAINS OUT FLAT



1A Cross Chain Hook 1B Fastener & Link 1C Tail Rings

Lay chains out flat behind atv tire with aggressive side of chains facing up. Make sure ends of cross chain hooks are facing up (1A). Note location of boomer fastener link (1B). Place rings and boomer fasteners at base of tire (1C). Position tails with shackles at far end. Remove all twist and tangles.

2. DRAPE CHAINS OVER TIRE




Drape chains over tire in the same position. Make sure aggressive side of chains, and ends of cross chain hooks, face up and away from tire. Center chains on tire treads and position rings to touch the ground in front of the tire. Tuck rings under the tire a bit in preparation to roll over them.

3. ROLL ATV FORWARD



Roll ATV forward over chains until tails with shackles hang downward, and side chain boomer fasteners and rings are easily accessible. Now you are ready to first attach the boomer side chain fasteners (STEP 4) and then connect the tails to the side chain (STEP 5).


4. ATTACH BOOMER FASTENERS

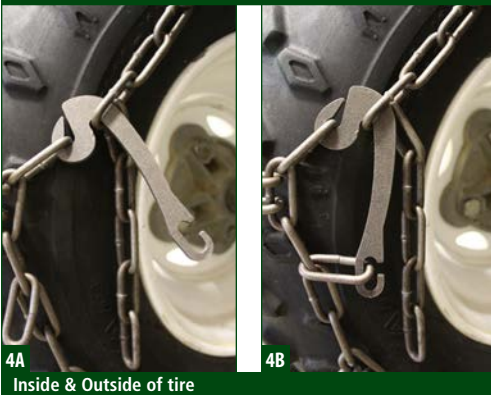

4A. Attach inside first by placing end of boomer fastener through side chain link. Count links remaining. Boomer fasteners may need to be re-tightened after connecting tails in step 5.

4B. Pull boomer fastener back toward side chain to tighten tire chains and attach end to fastener link. Count the same number of links on outer side chain and REPEAT STEPS 4A-4B.

5. CONNECT TAILS

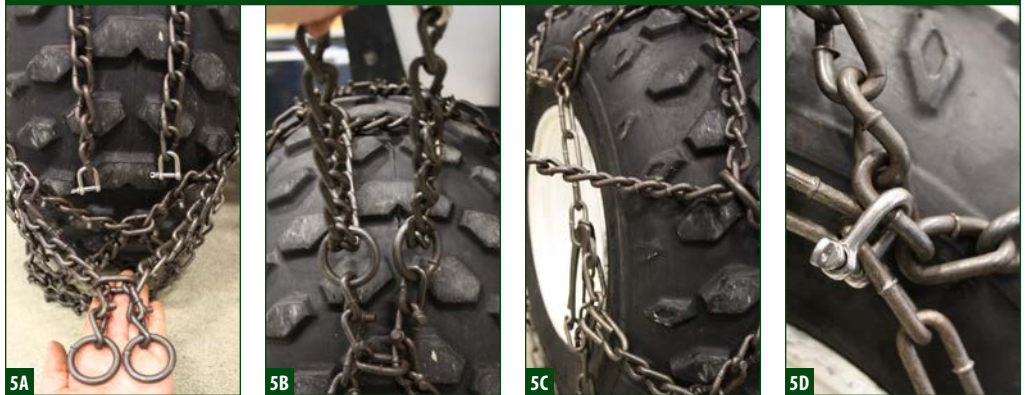

5A. Place tail ends with shackles through rings.

5B. Pull both tails through the rings pulling upward and outward to tighten tire chains. Now your ready to connect tails to side chain using shackle.

5C. Let go of the right tail and pull the left tail toward the outer side chain until it feels snug. Remove shackle.

5D. Connect tail link to side chain with shackle. Count the number of tail links where you connected it. Count the same number of links on inner tail and REPEAT STEPS 5C-5D.

6. TEST DRIVE. INSPECT. RE-TIGHTEN

Test drive. Inspect chains. Re-tighten tire chains by repeating steps 4A-4D so chains fit snug. Make sure tails and boomer fasteners are secure. Attach extra links back to the side chain with heavy duty cable ties (6A).



7. ADD CHAIN ADJUSTERS



Add chain adjusters for a more secure fit and to extend the life of your chains.

**DRIVE
SAFE
SPEED LIMIT
WITH CHAINS**

30
M P H